


Osprey[®] 210e

Video Capture Card

*Get reliable video
and audio capture.*

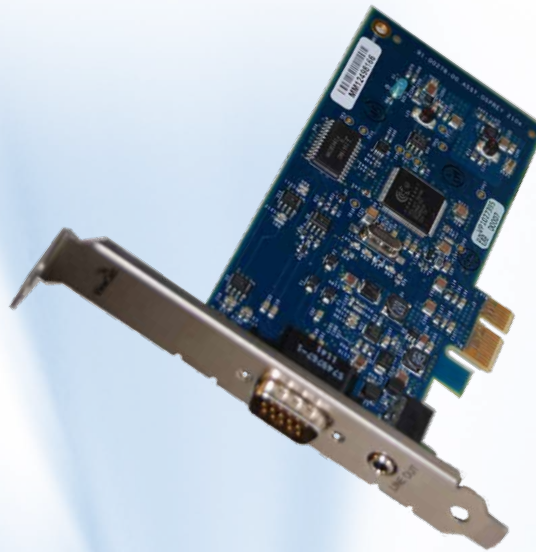

With on-board analog stereo audio inputs, the Osprey 210e is perfect for low-cost systems needing one video input and one unbalanced audio input. Monitor audio capture with enhanced sound capture at lower bit rates at an attractive price.

Video capture and streaming possibilities.

Like all Osprey cards, you can plug in additional Osprey 210e cards or mix and match with other Osprey cards whenever you need additional video and audio channels. And, the Osprey 210e supports the most popular video and audio APIs.

Optimized to meet your needs.

Add SimulStream[®] and deliver full-frame video to high-speed Internet users or smaller, lower-rate video to DSL and dial-up subscribers, plus optimized video for several different mobile device standards. And, save the same content to a storage device for post-processing and other Video on Demand (VOD) applications.

Ideal Solutions

- > Broadcasters
- > Enterprise
- > Government
- > OEM systems integrators

Applications

- > Webcasting
- > Live streaming
- > Podcasting
- > Mobile TV
- > Video on Demand
- > Surveillance

Key Attributes

- > Includes BNC composite video input via breakout cable
- > Provides audio loop-back output via rear-panel headphone connection
- > Supports closed-caption extraction
- > Increases integration flexibility by allowing multiple cards to operate within a single PC
- > Captures full-frame video at 30 frames per second providing full standard-definition resolution for maximum quality
- > Drivers available for Microsoft[®] Windows[®] and Linux operating systems

OSPREY® 210e

Video Capture Card



Breakout Cable



Specifications

Driver Support:

- Microsoft® DirectShow® API
- Linux available from open source community

Inputs:

Video:

One channel selectable input:

- Composite (*BNC x 1*)
- S-Video (*mini-DIN*)

Audio:

- Unbalanced stereo (*RCA x 2*)
- Unbalanced (*3.5 mini phono*) stereo

Outputs:

Audio:

- Unbalanced stereo line (*3.5 mm*)

Video Format:

- NTSC/PAL

Pre-Processing:

- Closed-caption extraction/rendering
- Logo/bitmap overlay
- Scaling, cropping, de-interlacing and inverse telecine
- Loss of video automatic test pattern generation with text overlay option

Dimensions:

- Low Profile Form Factor
- 5.00" L x 2.71" H
(12.70 cm L x 6.88 cm H)
- 32-bit/5 Volt PCI™ card
- Full PCI Rev 2.1 compliance

Hardware Warranty:

- 1 year limited hardware warranty

System Requirements:

- Multi-core processors are recommended to run video applications.

ViewCast® Delivering Video Whenever, Wherever



© 2012 ViewCast Corporation. ViewCast®, Niagara®, Osprey®, SimulStream®, SchedulStream®, GoStream®, EZStream® and Niagara SCX® (and design)™ are registered trademarks of ViewCast Corporation or its subsidiaries. Flash is a trademark of Adobe Systems Inc. iPad, iPod and iPhone are registered trademarks of Apple Inc. All other trademarks are the property of their respective owners. Product specifications and availability may change without notice.

US / Canada 800.250.6622 | Europe / Middle East / Africa +020 7250 4756 | Asia / Pacific +852 2251 8778 | viewcast.com

O-210e_ds_B13vA